

Product Specifications

920-923MHz Filter

TMR-NF/F

Main Features

- Compact, low weight
- High reliability
- Simple installation

Electrical Specifications

Frequency range(MHz)	920.00-923.00MHz
Insertion loss(dB)	≤ 4.0 dB
Return loss	≥ 18 dB
Out of band Rejection(dB)	≥ 50 dB@915MHz
Out of band Rejection(dB)	≥ 50 dB@925MHz
Impedance(ohms)	50
Input power(W)	50max

Environmental Specifications

Temperature range	-10°C to +55°C
Storage temperature range	-40° C to +85° C
Relative humidity	5% - 95%
Barometric pressure	55 KPa -106KPa


Mechanical Specifications

Input connector	N-Male
Output connector	N-Female
Waterproof Grade	IP67
Outer Dimension (mm)	140*84*47
Finish	As your Requirement
Packing	1Pce in box

Product Specifications


920-923MHz Filter

Outline Drawing

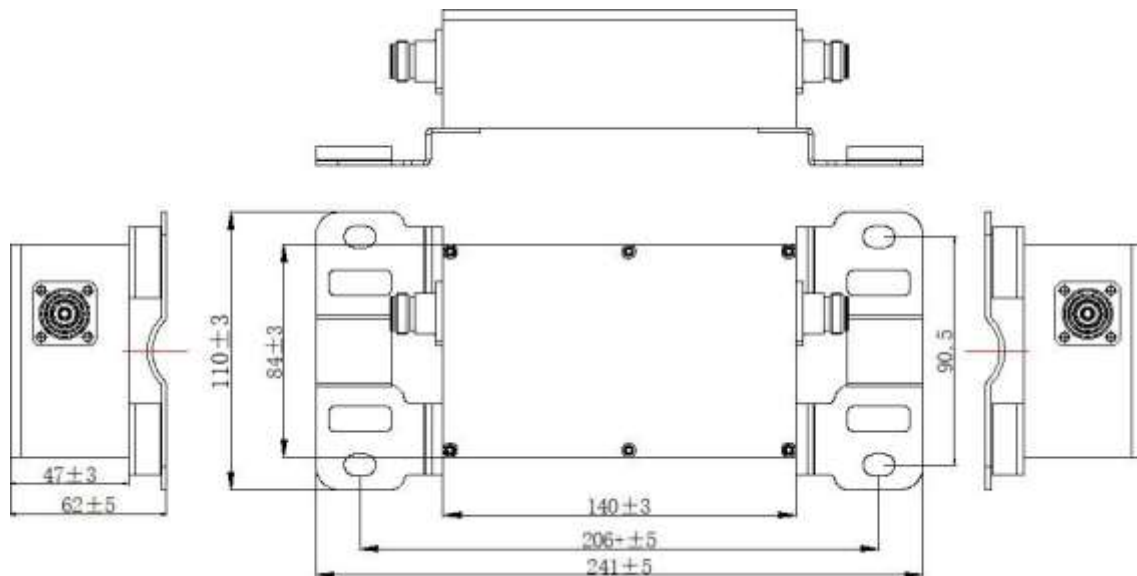

Product Specifications

920-923MHz Filter

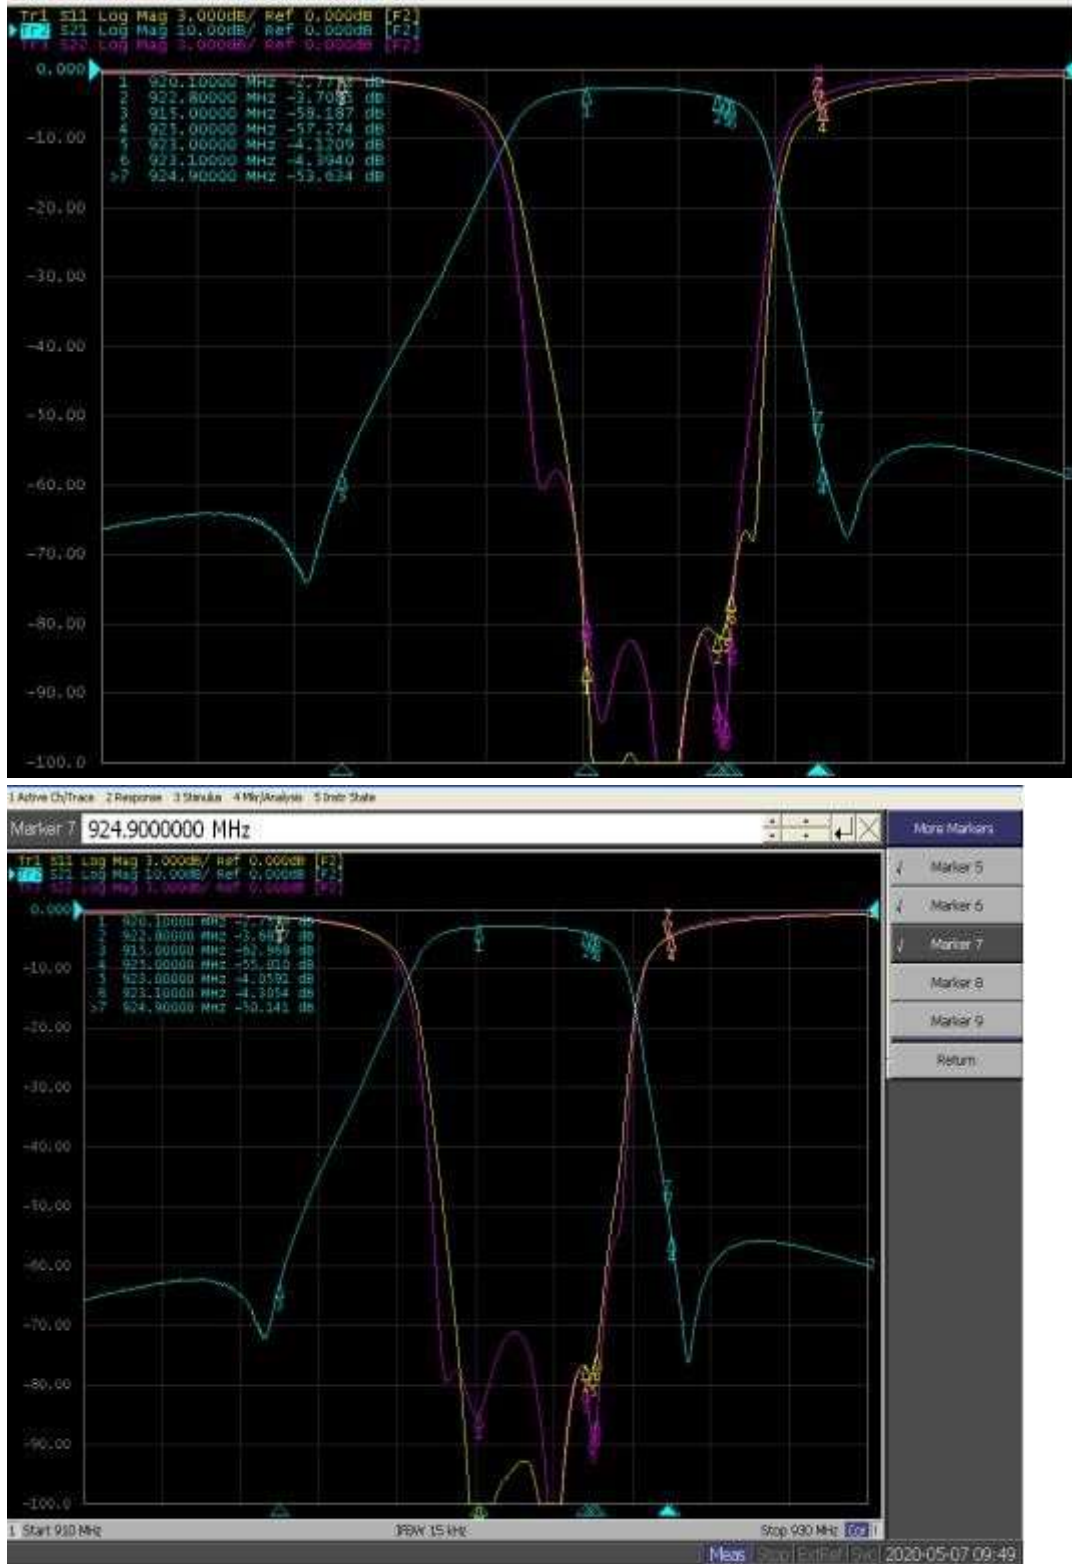

PT. TEMARA GLOBAL TEKNOLOGIKA

Centennial Tower, Level-29, Jl. Gatot Subroto Kav 24-25, Jakarta Selatan, DKI Jakarta – 12950, Indonesia
 Phone: +62-21-29608127, Mobile: +62-821-1135-8802, Email: info@temara.co.id, Website: www.temara.co.id